

Aquablend® eSQX™ Touch Free - Auto Sense Point of Use Thermostatic Wall Mixer - Front of Wall Component

ATAMC1

Aquablend® eSQX™ is Australia's first and most technically advanced touch-free thermostatic mixer solution. Designed to deliver touch-free pre-mixed warm water for enhanced infection control and cross-contamination prevention. The solution includes an infra-red sensor located beneath the outlet, designed for general hand hygiene within healthcare and food preparation facilities.

KEY FEATURES

- Auto Sense function - place hand under spout to turn on, move hand away to turn off
- Low voltage 12V mains power supply
- 200mm spout
- Flush cycle stagnation management to reduce risk of bacterial growth, usage monitoring and other function settings are adjustable via Oras App and Bluetooth connectivity
- Effective reduction of Legionella risk
- AHFG Type A and B healthcare basin compatibility
- Compatible with Smartflow Monitoring System for TMV monitoring and reporting
- Smart, durable easy-clean chrome surfaces
- Smooth bore tubular spout designed to minimise bacteria growth
- IP67 rated connections
- Faceplate can be removed to access integral isolation/check valves, strainers and inspection ports
- Watermark Certified to AS4032.4
- Requires In-Wall Component ATM621 or ATM621SF



PRODUCT CODES

ATAMC1L5	eSQX Front of Wall Component Auto Sense - 12V Mains - 200mm Spout 6Lpm Laminar Flow
ATAMC1L6	eSQX Front of Wall Component Auto Sense - 12V Mains - 200mm Spout 4.73Lpm Laminar Flow

Order with: (Select one In-Wall Component)


ATM621	eSQX In Wall Component - 12V Mains
ATM621SF	eSQX In Wall Component - 12V Mains - with Single Probe Kit for Connection to Smartflow TMV Monitoring System

Version 1.1__05Oct22


Aquablend® eSQX™ Touch Free - Auto Sense Point of Use Thermostatic Wall Mixer - Front of Wall Component

TECHNICAL INFORMATION

Sensor Range	250mm (Factory default setting - adjustable)
Maximum Flow Time	2 minutes (Factory default setting - adjustable)
Minimum Water Run Time	2 secs (+/-1) after hands removed from sensor range (Factory default setting - adjustable)
Sensor Power Supply	12VDC

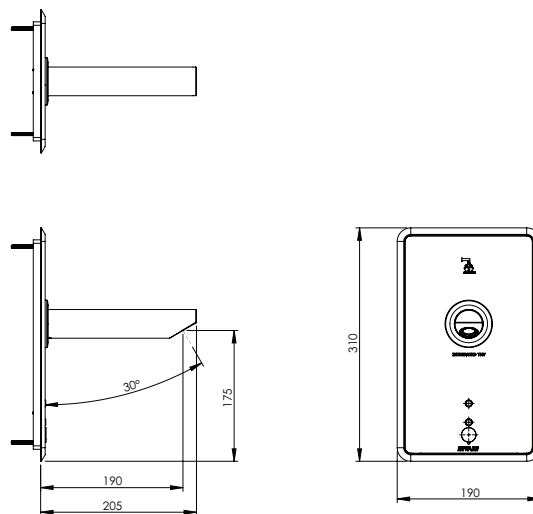

Water Flow Projection

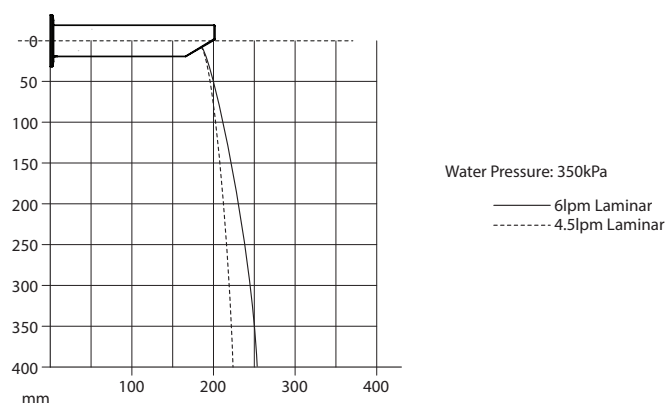

Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

Enware Australia advises:

1. Due to ongoing Research and Development, specifications may change without notice. 2. Component specifications may change on some export models. 3. Refer to warranty statement for warranty details - www.enware.com.au/warranty

Version 1.1__05Oct22

