Aquablend™ SQX™ Basin Mixer with 100mm Lever Handle

Aquablend™ SQX™ high performance thermostatic mixing valve technology combined with sequential mixing technology provides the first Watermark Certified point of use thermostatic mixers in Australia.

The range delivers the most advanced choice for safe warm water delivery in high risk applications such as hospitals and aged care facilities, offering anti-scald protection and reduced risk of Legionella.

Duty of care is improved with the TMV located at the outlet reducing the risk of microbial or bacterial growth within the plumbing supply lines.

Suitable for health and general applications, with NSW Health approval for use in health care in NSW.

FEATURES

- Provides personal temperature control at 'Point of Use'
- Compliant to AS4032.4
- Sequential operation for energy efficient flow and temperature control
- Cool to touch & non-conductive mixer body
- Colour indication on handle for easy identification

- Easy to clean design
- Serviceable in-situ
- Fixed spout
- Australian designed and manufactured
- User friendly, ergonomically designed mid length handle

ATM606L



Product Codes


ATM606L-4 8 lpm nominal flow rate **ATM606L-5** 6 lpm nominal flow rate **ATM606L-6** 5 lpm nominal flow rate






Technical Information

| Hot Inlet Temperature Range | 55°C - 85°C |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Cold Inlet Temperature Range | 5°C - 25°C |
| Adjustable Temperature Range | Full Cold - 46°C |
| Operating Working Pressure | 20 - 500 * kPa |
| Dynamic Inlet Pressures | Min 20kPa Max 500kPa For optimum operation it is recommended that the hot and cold water supply pressures be balanced within +/- 10% |



*Enware tapware must be installed in accordance with the provisions of AS/NZS 3500. Installations not complying with AS/NZS 3500 may void the product and performance warranty provisions. Enware Australia advises: 1. Due to ongoing Research and Development, specifications may change without notice. 2. Component specifications may change on some export models.

Version: Apr 19

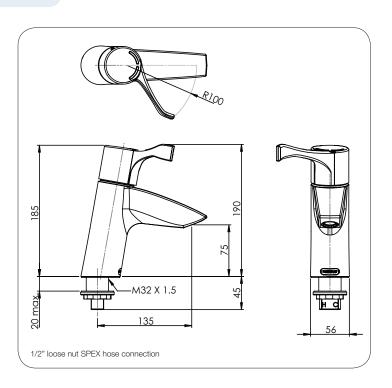

Call 1300 369 273 www.enware.com.au

