

# Chrome Hand Held Shower and Smooth Hose with 900mm Stainless Steel Grab Rail

## ECRS023C

Water efficient handheld shower set with chrome shower head and holder, smooth hose and stainless steel grab rail.

Suitable for commercial amenities, hospitals, hotels, sporting facilities and public areas.

### FEATURES

- Chrome plated shower head
- Single spray pattern
- Single-hand adjustable shower head holder
- Chrome plated wall elbow complete with spring loaded dual check valve
- 1.5m smooth hose in chrome finish
- Stainless steel heavy duty grab rail 900mm long Chrome Plated (Bright 3 Stainless Steel)
- Concealed wall flange fixings
- CleanSeal flange and cover with a simple fixing method and a hygienically mounted installation.
- Provides for easily cleaned crevice-free condition that inhibits bacterial build up.
- Suitable for AS1428.1 applications\*

\*Wall outlet must be installed 700mm from finished floor level

### Product Codes

**ECRS023C** Chrome hand held shower, smooth chrome hose, shower head holder and stainless grab rail chrome plated (Bright 3 Stainless Steel finish)

### OPTIONS

- 900mm grab rail only (Chrome Plated - Bright 3 Stainless Steel) **EC900CP**
- Without grab rail **SP274CSL**
- Handheld shower, hose & wall elbow only **SP274C**

### Load Rating:

Enware Grab Rails that are manufactured within the guidelines of AS1428 are compliant with being able to withstand 1100N of force applied in any direction.


Fixing screws are not supplied with product. Ensure grab rail is installed on a solid wall surface with firm wall backing using appropriate fixing method. Structural engineers or licensed tradespersons should be consulted for appropriate advice on suitability of the fasteners and wall structure before affixing or installing any Enware products. Enware does not provide any warranty in relation to bolts, screws or other fasteners used with Enware products.

### Technical Information

Inlet Connection	1/2" BSP (15mm)
Working Pressure Range	150 - 500 kPa
Flow Rate	8.5 l/m
Maximum Water Temperature	70 °C

Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

Enware Australia advises: 1. Due to ongoing Research and Development, specifications may change without notice. 2. Component specifications may change on some export models. 3. Refer to Warranty Statement for warranty details - [www.enware.com.au/warranty](http://www.enware.com.au/warranty)

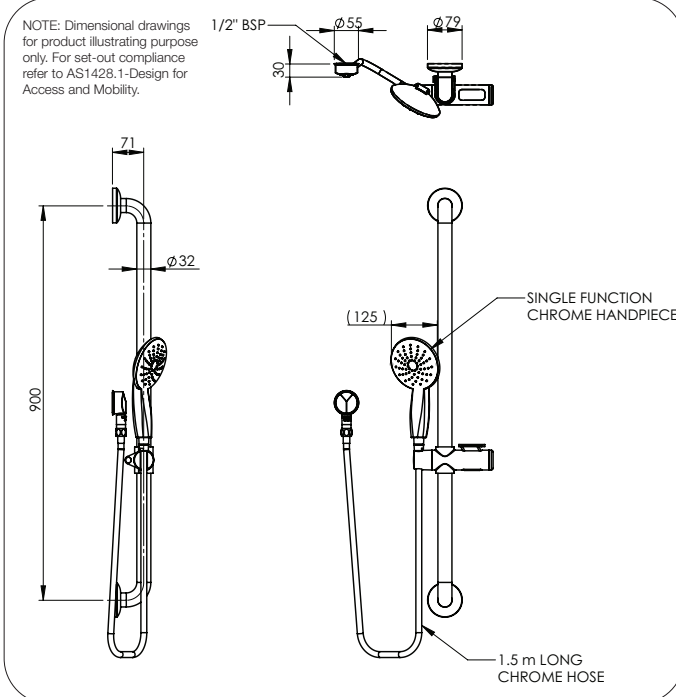

Version: Nov 21

Call 1300 369 273  
[www.enware.com.au](http://www.enware.com.au)

Enware Australia Pty Limited  
9 Endeavour Rd Caringbah NSW 2229 Australia  
Ph: 02 8536 4000 [info@enware.com.au](mailto:info@enware.com.au)

