

Concealed Spindle Series Wall Set with SP201 Fixed Aerated Spout

CS314

The ergonomically designed CS (Concealed Spindle) Series handle features a dress skirt that conceals the anti-vandal handle fixing and the spindle. An internal locking ring secures the handle to the spindle, which may only be released by using the key provided.

FEATURES

- Vandal-resistant internal locking ring secures the handle – can only be released by the key
- Highest quality dezincification resistant brass construction
- Supplied complete with handles, buttons and outlets
- Standard finish is heavy duty bright chrome
- Aerators are supplied standard on basin and sink mixing sets
- WELS 3 Star (8 lpm) water efficiency rating supplied as standard. Also available in 5 Star (6 lpm)

OPTIONS

- Satin chrome or epoxy powder coating (bright chrome supplied as standard)
- Anti-Vandal Aerator available - SP303
- Laminar flow is available
- Extended spindles available in 15, 20, 25, 30 and 40mm
- Various spout options available
- Red and Blue Indicators supplied as standard, yellow for warm water available on request



WaterMark
AS/NZS 3718 WMKA 1583
SAI Global



Product Code

CS314	Jumper Valve
CSQ314	1/4 turn Ceramic Disc
CSH314	1/2 turn Ceramic Disc
CST314	3/4 turn Ceramic Disc

Technical Information

	CERAMIC DISC	JUMPER VALVE
Minimum–Maximum Working Pressure (AS/NZS 3500)*	50–500 kPa	30–500 kPa
Maximum Static Pressure	800 kPa	1200 kPa
Maximum Working Temperature**	85°C	95°C

*Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500.


AS/NZS 3500.4 Heated Water Services:

All heated water installations for sanitary fixtures used primarily for personal hygiene purposes shall deliver heated water at a temperature not exceeding:

- 45°C for healthcare and aged care buildings, early childhood centres, primary and secondary schools and nursing homes, or similar facilities for the aged, the sick, children or people with disabilities; and
- 50°C for all other situations (Laundries and kitchen sinks are not required to have heated water at a maximum of 50°C)

NOTE: Enware Australia advises:

1. Due to ongoing Research and Development, specifications may change without notice.
2. Component specifications may change on some export models.

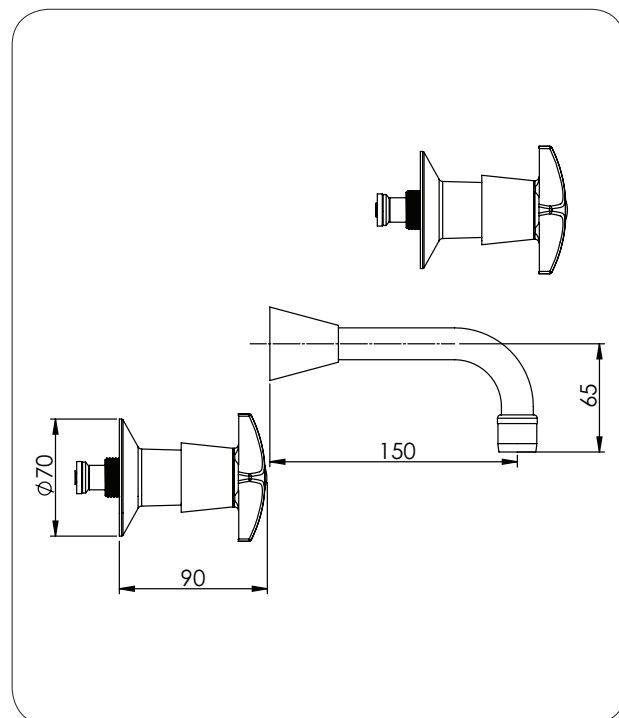

Version: Jan 17

Call 1300 369 273
www.enware.com.au

Enware Australia Pty Limited
9 Endeavour Rd Caringbah NSW 2229 Australia
Ph: 02 8536 4000 Fax: 02 8556 4055

ENWARE
installing confidence