

Wall Mounted Hand Held Drench Hose - 1.5m

Designed to be used as a secondary support to primary eyewash stations and deluge showers not as a replacement.

Install near workplace hazard locations for a quicker response time. Soft aerated water flow for flushing of eyes and other body parts.

Ideal for industrial, commercial and educational applications.

KEY FEATURES

- Chrome plated brass body
- Aerated adjustable spray nozzle with dust cap
- Dust cap flips open upon activation
- Self-closing trigger spray with stay-on holding ring
- Supplied with 1.5m stainless steel braided hose and wall bracket



PRODUCT CODE


EL420

Wall Mounted Hand Held Drench Hose -
1.5m

Due to ongoing Research and Development, specifications may change without notice.
Component specifications may change on some export models.
Refer to warranty statement for warranty details - www.enware.com.au/warranty.

TECHNICAL DATA

Minimum Recommended Pressure	50 kPa
Maximum Recommended Pressure	500 kPa
Minimum Pressure to achieve ANSI Z358.1 and AS4775 compliance	210 kPa
Minimum Flow Rate	6 L/min
Maximum Flow Rate	13 L/min
Inlet Connection	15mm (1/2" BSP)
Recommended Temperature Range	Tepid (15.6°C - 37.8°C)

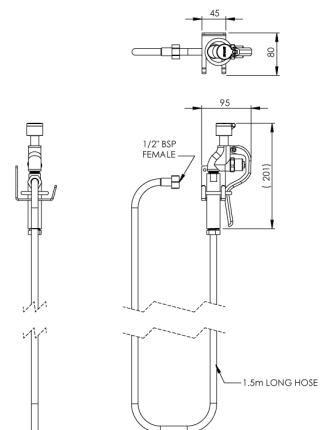

Wall Mounted Hand Held Drench Hose - 1.5m

SPARE PARTS

ESPE015	Spare Parts: ECE Eyewash Aerator and Washer
ESPE016	Spare Parts: ECE Eyewash Dustcover with Aerator - Pair
FS721S	Spare Parts: Food Service - Stuffing Box Assembly - FS721/FS729
FS077NS	Spare Parts: Service Kit Suits FS729
FS790	Spare Parts: Trigger Spray Handle & Screw Replacement Part