

Enware Wellbeing® Sequential Shower Mixer 65mm Lever

WBSHSQ65

The Wellbeing® tapware range brings Enware's years of experience in producing lever tapware to modern tapware design, addressing the timeless requirements for ease of use, purpose, longevity and up-to-date aesthetic appeal.

The sequential lever turns progressively from "off" to "cold" to "mixed" (or hot). This enhances safety, reduces hot water consumption and potentially reduces risk of legionella.

KEY FEATURES

- Ergonomic anti-bacterial tactile lever
- Seamless single lever progressive mixing
- "Click" when moving from cold to mixed water
- Colour Indicators for hot/ warm/ cold
- Adjustable wall flange with o-ring seal
- Compact design - 50mm in-wall depth
- 5 Year Commercial Warranty



PRODUCT CODES

WBSHSQ65


Enware Wellbeing Sequential Shower Mixer 65mm Lever

Enware Wellbeing® Sequential Shower Mixer

65mm Lever

TECHNICAL INFORMATION

Working Pressure Range	Min 50 kPa Max 500 kPa
Maximum Static Pressure	800 kPa
Maximum Working Temperature	85°C (Ceramic disc)

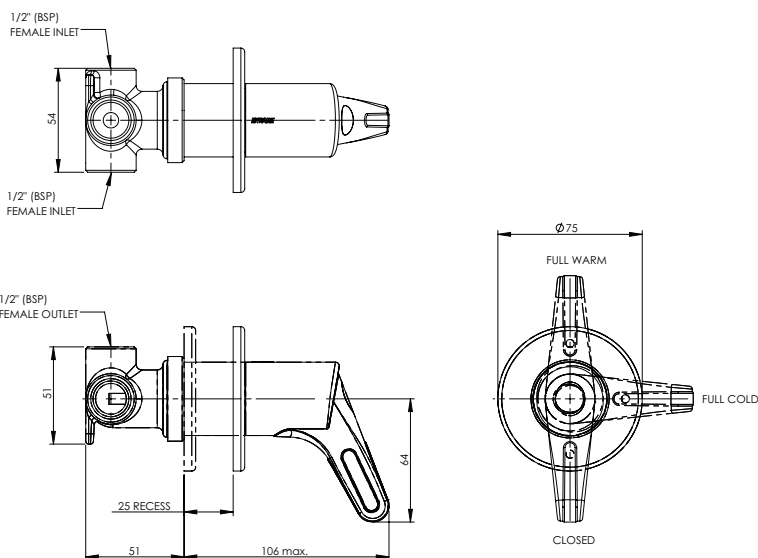

Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

Enware Australia advises:

1. Due to ongoing Research and Development, specifications may change without notice. 2. Component specifications may change on some export models. 3. Refer to warranty statement for warranty details - www.enware.com.au/warranty

Version 2.0__24Jan23