

Slimline 3-Way Bench Mounted Laboratory Tap with 2 Fixed and 1 Swivel Gooseneck Outlet

Enware's Slimline laboratory outlets are supplied with a tapered tube nozzle and are assembled for each specific media type.


The durable powder coat finish gives significant protection against corrosion, discolouration and surface damage.

Slimline handles are ergonomically designed for precise feel and finger tip control. Handles are colour coded for easy service identification and use complimentary buttons.

FEATURES

- Ceramic disc (3/4 turn)
- Durable powder coat finish
- Handles and indicator button to suit specified media
- Tube nozzle with flow control and dual check valves
- Two fixed outlets, one swivel gooseneck spout

LCN103

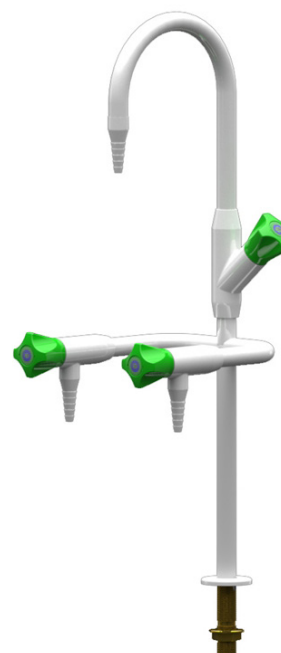

Product Codes

LCN103 Ceramic Disc - Water Only



Technical Information


Inlet Connection	1/2" BSP Male
Working Pressure Range Ceramic Disc	20 - 700 kPa* (Water)
Maximum Testing Pressure	1000 kPa
Working Temperature Range	0 - 90 °C
Outlet Connection	Tube Nozzle
	3/8" BSP Female (without nozzle)
Water Options	Cold, Hot <i>Note: Client to specify media type</i>

*Enware products are to be installed in accordance with the Plumbing Code of Australia (PCA) and AS/NZS3500. Installations not complying with PCA and AS/NZS 3500 may void the product and performance warranty provisions.

Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

NOTE: Enware Australia advises:

1. Due to ongoing Research and Development, specifications may change without notice.
2. Component specifications may change on some export models.
3. Refer to Warranty Statement for warranty details - www.enware.com.au/warranty

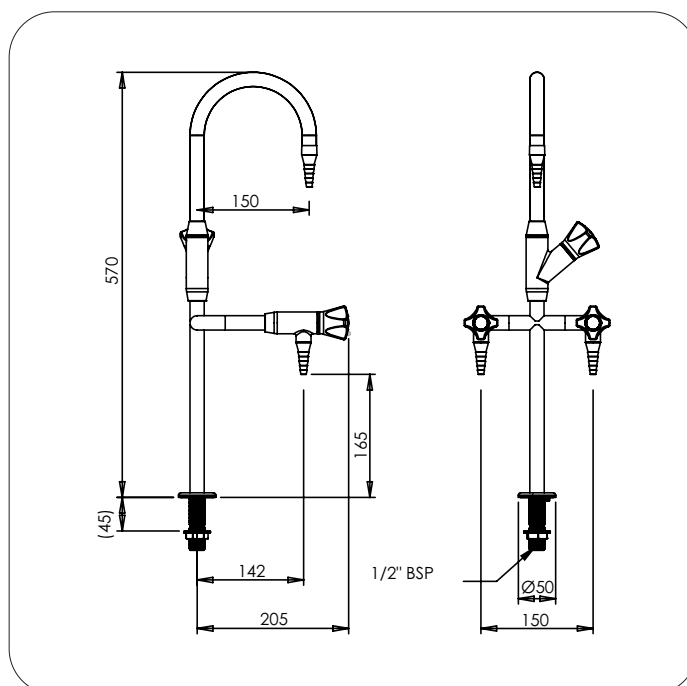

Version: Sep 21

Call 1300 369 273
www.enware.com.au

Enware Australia Pty Limited
9 Endeavour Rd Caringbah NSW 2229 Australia
Ph: 02 8536 4000 info@enware.com.au

