Slimline Bench Mounted Laboratory Mixing Set with Swivel Gooseneck Outlet & Lever Handles

Enware's Slimline laboratory outlets are supplied with a tapered tube nozzle and are assembled for each specific media type.

The durable powder coat finish gives significant protection against corrosion, discolouration and surface damage.

The simple lever action provides hands-free elbow or palm operation suitable for sterile environments where hygiene is critical.

FEATURES

- Ceramic disc (1/4 turn)
- Durable powder coat finish
- Indicator button to suit specified media
- Tube nozzle with flow control and dual check valves
- Swivel gooseneck spout
- 1/4 turn contra-rotating handles (push handles outward to open)
- 150mm lever handles

Product Codes

LCN113L Ceramic Disc 1/4 Turn with Lever Handles

- Water Only

SPARE PARTS

- SBA Cold (Right) LCN188RTC
- SBA Hot (Left) LCN188LTC

Technical Information

Inlet Connection	1/2" BSP Male
Working Pressure Range Ceramic Disc	20 - 700 kPa* (Water)
Maximum Testing Pressure	1000 kPa
Working Temperature Range	0 - 90 °C
Outlet Connection	Tube Nozzle
	3/8" BSP Female (without nozzle)
Water Options	Cold, Hot Note: Client to specify media type

*Enware products are to be installed in accordance with the Plumbing Code of Australia (PCA) and AS/ NZS3500. Installations not complying with PCA and AS/NZS 3500 may void the product and performance warranty provisions.

Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these product NOTE: Enware Australia advises:

1. Due to ongoing Research and Development, specifications may change without notice.


- Component specifications may change on some export models.
 Refer to Warranty Statement for warranty details www.enware.com.au/warranty

LCN113L







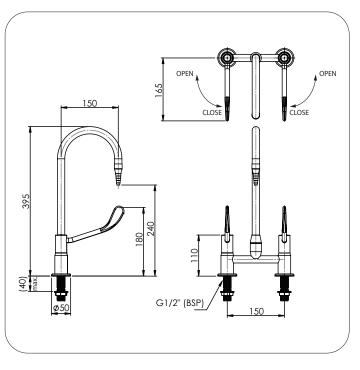

Version: Sep 21

