

# Slimline Two Way 90 Degree Bench Mounted Laboratory Tap (Dry Media)

## LCN146N

Enware's Slimline laboratory outlets are supplied with a tapered tube nozzle and are assembled for each specific media type.

The durable powder coat finish gives significant protection against corrosion, discolouration and surface damage.

Slimline handles are ergonomically designed for precise feel and finger tip control. Handles are colour coded for easy service identification and use complimentary buttons.


### FEATURES

- Suited for dry media up to technical gas level 2.0 (with isolation), 4.0 (without isolation) and higher upon request
- Teflon needle valve with stainless steel seat
- Durable powder coat finish
- Handle and indicator button identification to suit specified media
- 1/2" BSP male inlet tail with 1/4" BSP female thread connection
- Tube nozzle
- Optional integral isolation/ service valve

### Product Codes

**LCN146N** Needle Valve

**LCN146NI** Needle Valve with Integral Isolation Valve

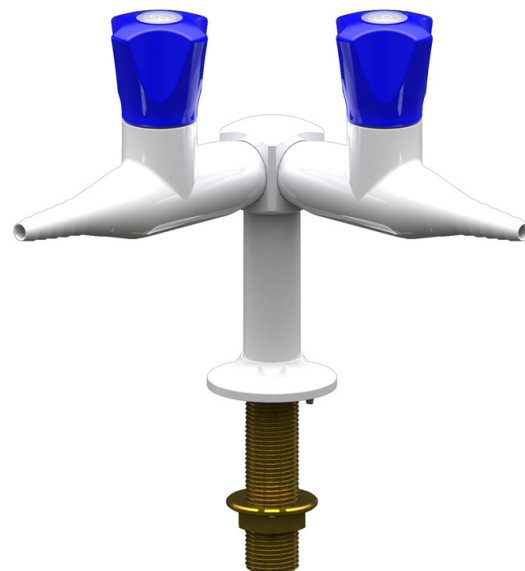


### Technical Information

Inlet Connection	1/2" BSP Male
	1/4" BSP Female
Recommended Maximum Working Pressure - Needle Valve	700 kPa (dry media)
Maximum Testing Pressure	1000 kPa
Outlet Connection	Tube Nozzle
	3/8" BSP Female (without nozzle)
Burning Gas Options	Argon, Carbogen, Carbon Dioxide, Compressed Air, Helium, Hydrogen, Nitrogen, Nitrous Oxide, Oxygen, Vacuum. <i>Note: Client to specify media type</i>

NOTE: Enware Australia advises:

1. Due to ongoing Research and Development, specifications may change without notice.
2. Component specifications may change on some export models.
3. Refer to Warranty Statement for warranty details - [www.enware.com.au/warranty](http://www.enware.com.au/warranty)

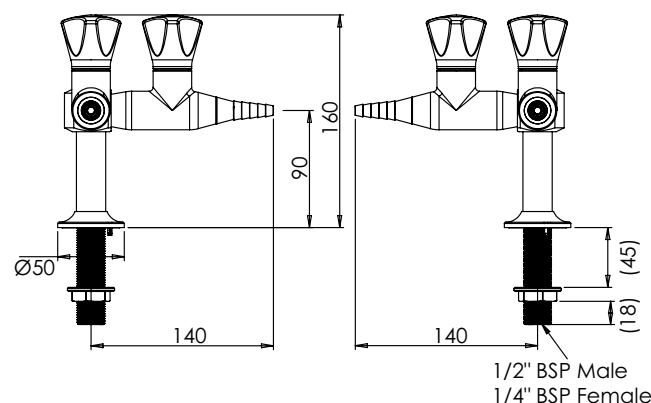

Version: Sep 21

**Call 1300 369 273**  
**[www.enware.com.au](http://www.enware.com.au)**

Enware Australia Pty Limited  
9 Endeavour Rd Caringbah NSW 2229 Australia  
Ph: 02 8536 4000 [info@enware.com.au](mailto:info@enware.com.au)

