

# Slimline Front Panel Valve - Water

Enware's Slimline laboratory front panel valves are assembled for each specific media type.

The durable powder coat finish gives significant protection against corrosion, discolouration and surface damage.

Slimline handles are ergonomically designed for precise feel and finger tip control. Handles are colour coded for easy service identification and use complimentary buttons.

All front panel valves are designed to be compact and easy to install and have a range of complimentary outlet options to choose from.

## LCN152

### FEATURES

- Ceramic disc (3/4 turn) or needle valve headworks
- Durable powder coat finish
- Handle and indicator button identification to suit specified media



### Product Codes

<b>LCN152M</b>	Ceramic Disc - 1/4" BSPT (Cold/ Hot Water)
<b>LCN152NM</b>	Needle Valve - 1/4" BSPT (Chilled Water)




### Technical Information

Inlet / Outlet Connection	1/4" BSPT
Working Pressure Range Ceramic Disc	20 - 700 kPa* (Water)
Working Pressure Range Needle Valve	1 - 700 kPa* (Water)
Maximum Testing Pressure	1000 kPa
Working Temperature Range	0 - 90 °C
Water Options	Cold, Hot and Chilled Water <i>Note: Client to specify media type</i> <i>Chilled Water available with needle valve only.</i>

\*Enware products are to be installed in accordance with the Plumbing Code of Australia (PCA) and AS/NZS3500. Installations not complying with PCA and AS/NZS 3500 may void the product and performance warranty provisions.

Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

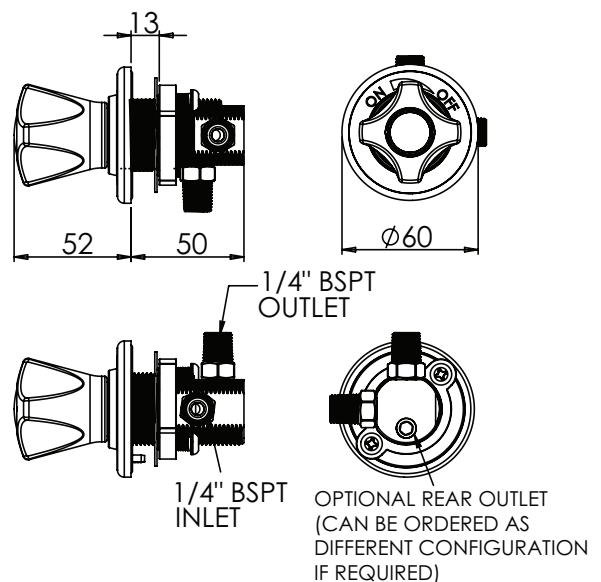

Version: Sep 21

Call 1300 369 273  
[www.enware.com.au](http://www.enware.com.au)

Enware Australia Pty Limited  
9 Endeavour Rd Caringbah NSW 2229 Australia  
Ph: 02 8536 4000 [info@enware.com.au](mailto:info@enware.com.au)

