

LEVA Sequential In-Wall Basin Mixer with 230mm Spout

Sequential Leva range offers premium quality, ergonomic design and effortless activation. It is built for the rigours of daily use and the diversity of user groups.

Single plane sequential movement is a great feature as it provides effortless activation using either hand or wrist operation.

The sequential lever turns progressively from “off” to “cold” to “mixed”.

LEV80306WSQ-250



FEATURES

- Sequential Ceramic Disc Mixing Cartridge ensures ultimate control with cold start up and stop
- Colour Indicators for Hot/ Warm, Cold and Off
- Adjustable wall flange with o-ring seal around mixer body
- Compact design - 50mm in-wall depth
- With SPC250 spout
- 6 Lpm Laminar Flow aerator

OPTIONS

- LEV80306XWSQ - Sequential Basin Mixer 80mm Lever with No Spout

Product Code

LEV80306WSQ-250

Sequential Basin Mixer 80mm Lever with 230mm Spout



Technical Information

Working Pressure Range	50-800 kPa
Recommended Maximum Pressure	500 kPa **
Working Temperature Range	5 °C – 85 °C **


**Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500.

Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

NOTE: Enware Australia advises:

1. Due to ongoing Research and Development, specifications may change without notice.
2. Component specifications may change on some export models.
3. Refer to Warranty Statement for warranty details - www.enware.com.au/warranty

Due to handles being spline mounted, handles may be offset slightly from vertical or straight. This is normal and unavoidable

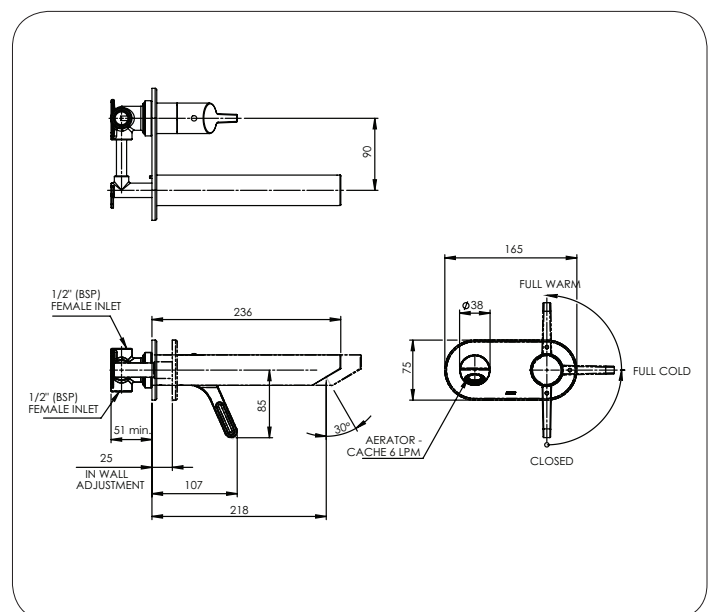

Version: Dec 19

Call 1300 369 273

www.enware.com.au

Enware Australia Pty Limited
9 Endeavour Rd Caringbah NSW 2229 Australia
Ph: 02 8536 4000 info@enware.com.au

