

Enware-Delabie Knee Operated Straight Time Flow Valve

TFC735

Enware-Delabie Knee Operated tapware provides hygienic hands-free activation with automatic shut off.

KEY FEATURES

- Knee-operated time flow basin valve
- 15 seconds* flow time
- Provides hygienic, hands-free activation of tapware
- Reinforced control lever
- Chrome-plated solid brass body
- Solid brass wall plate with reinforced fixing via 4 stainless steel screws
- Cold or mixed water supply

* Flow times are indicative only and may vary depending on water supply pressure and flow conditions.




PRODUCT CODES

TFC735	Enware-Delabie Knee Operated Straight Time Flow Valve
--------	---

Enware-Delabie Knee Operated Straight Time Flow Valve

TECHNICAL INFORMATION

Inlet Connection	15mm (1/2" BSP)
Working Pressure Range	Min 100 kPa Max 500 kPa
Recommended Pressure	250 - 300 kPa
Flow Rate	3 L/min at 300 kPa (factory set) Adjustable 1.4 L/min - 6 L/min
Flow Time	15 seconds * Flow times are indicative only and may vary depending on water supply pressure and flow conditions.
Maximum Water Temperature	70°C (Max 45°C recommended to avoid the risk of scalding)

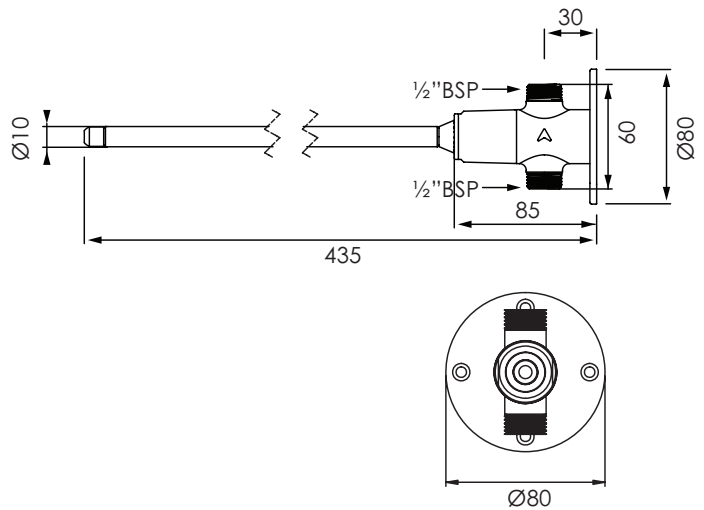

Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

Enware Australia advises:

1. Due to ongoing Research and Development, specifications may change without notice. 2. Component specifications may change on some export models. 3. Refer to warranty statement for warranty details - www.enware.com.au/warranty

Version 1.0__15Aug22