

Enware-Delabie Tempomix Shower Mixer - Recessed

TFC790925

The Tempomix shower mixers when operated provides a 30 second* automatic shut-off delay with the added benefit of temperature control. With an easy push button activation, the temperature is adjustable by rotating the control knob. Designed to comply with intensive use in public areas with a high resistance to vandalism.

FEATURES

- Easy push button activation
- Automatic shut-off delay 30 seconds (-10/+5 sec)*
- Coverplate is without exposed screws providing a high resistance to vandalism
- User temperature control: simply rotate button to increase or decrease temperature

* Times are indicative only and may vary depending on the water supply pressure and flow conditions

OPTIONS

Shower heads to suit available.

Enware-Delabie Tonic Jet Vandal Resistant Shower Head **TFC712000**

School Pattern Shower Outlet **VP310**



Product Codes

TFC790925 Tempomix Shower Mixer - Recessed




Technical Information

Inlet Connection	15mm 1/2" BSP
Maximum Testing Pressure	1000 kPa
Maximum Working Pressure	500 kPa **
Recommended Pressure	250 - 300 kPa
Maximum Water Temperature	70°C**
Operating Force	22N @ 300 kPa

**Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500.

Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

NOTE: Enware Australia advises: 1. Due to ongoing Research and Development, specifications may change without notice. 2. Component specifications may change on some export models.

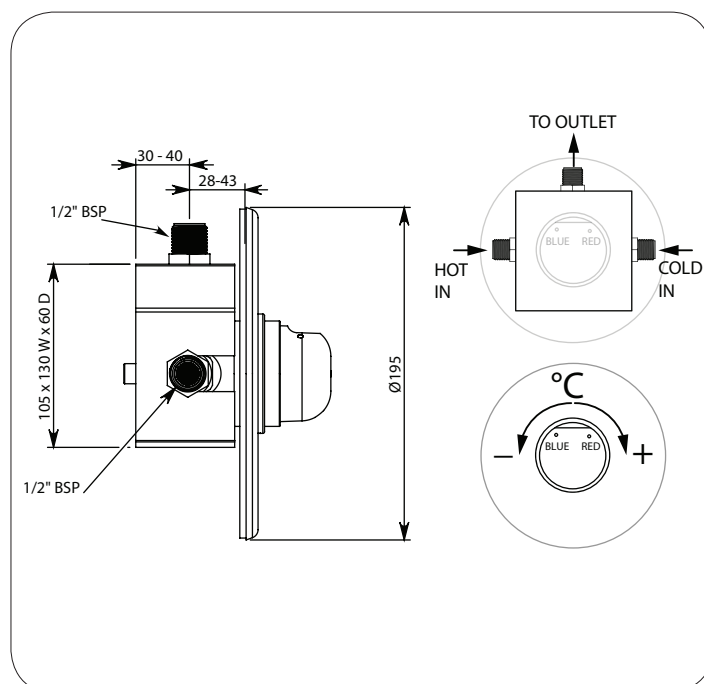

Version: Aug 19

Call 1300 369 273

www.enware.com.au


Enware Australia Pty Limited
9 Endeavour Rd Caringbah NSW 2229 Australia
Ph: 02 8536 4000 info@enware.com.au




Enware-Delabie Tempomix Shower Mixer - Recessed

TFC790925

SPARE PARTS

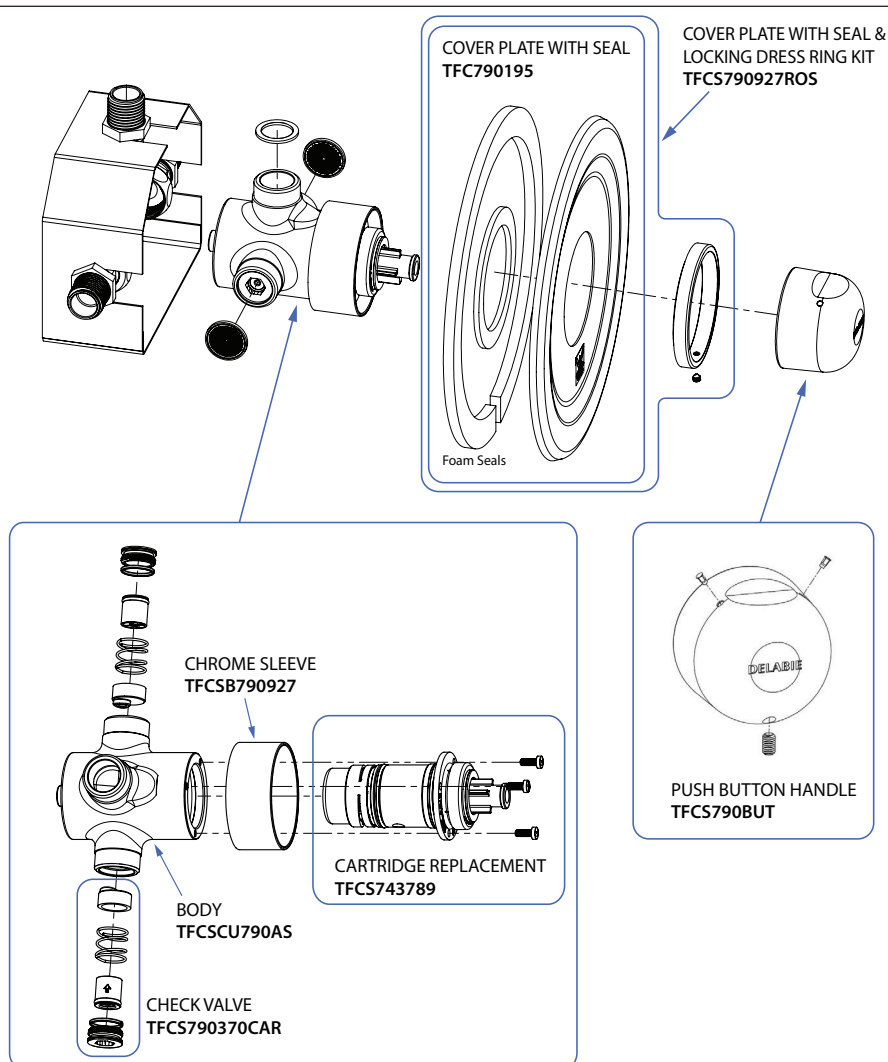

SPARE PARTS - PRE 2019

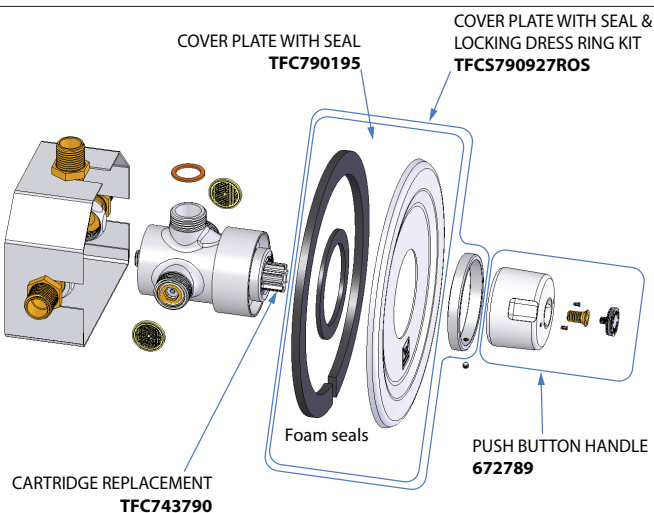

Version: Aug 19

Call 1300 369 273
www.enware.com.au

Enware Australia Pty Limited
9 Endeavour Rd Caringbah NSW 2229 Australia
Ph: 02 8536 4000 info@enware.com.au



DELABIE

TEMPOMIX

NT 795 V2

Indice D

FR Mitigeur temporisé
pour lavabo ou douche

EN Time flow mixer
for washbasins or showers

DE Selbstschluss-Mischbatterie
für Waschtisch oder Dusche

PL Bateria czasowa
do umywalki lub natrysku

NL Zelfsluitende mengkraan
voor wastafel of douche

ES Grifería mezcladora temporizada
para lavabo o ducha

PT Misturadora temporizada para
lavatório ou duche

RU Порционный смеситель
для раковины или душа



FR Purger soigneusement les canalisations
avant la pose et la mise en service du produit.

EN Thoroughly flush the pipes to remove any impurities
before installing and commissioning the product.

DE Vor Montage und Inbetriebnahme des Produkts
die Anschlussleitungen regelkonform spülen.


PL Dokładnie wypłukać instalację przed
montażem i uruchomieniem produktu.







NL Spoel zorgvuldig de leidingen alvorens
tot installatie of ingebruikname van de kraan over te gaan.






ES Purgar cuidadosamente las tuberías
antes de la instalación y de la utilización del producto.



PT Purgar cuidadosamente as canalizações
antes da colocação e utilização do produto.

RU Перед установкой и подключением устройства тщательно
промыть канализационные трубы напором воды.



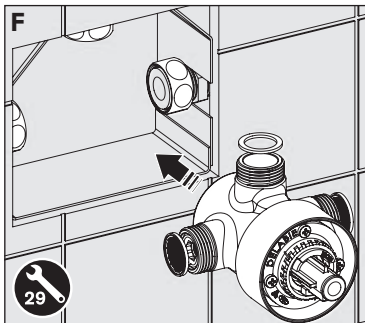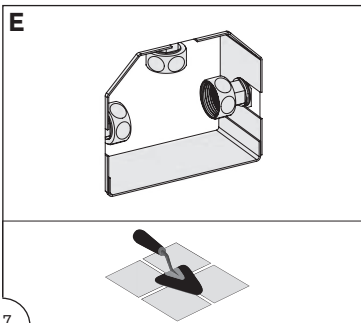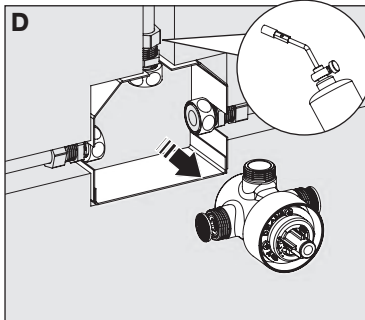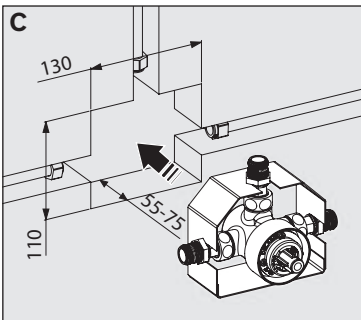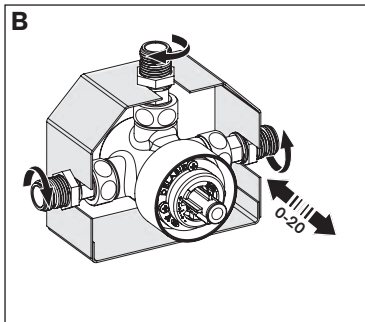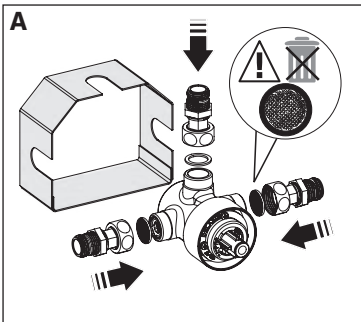

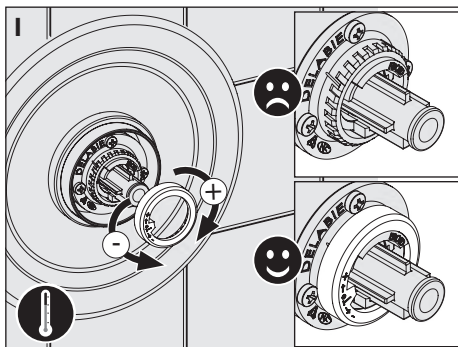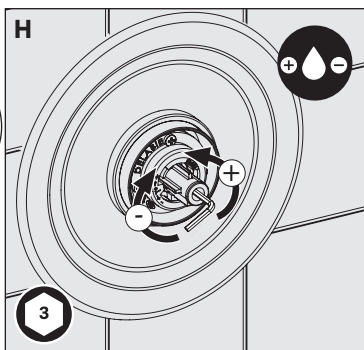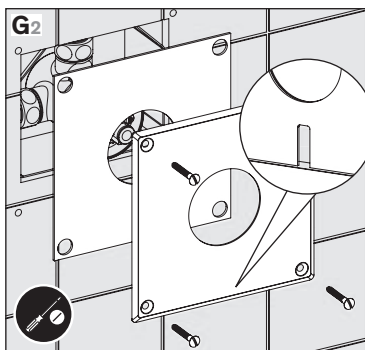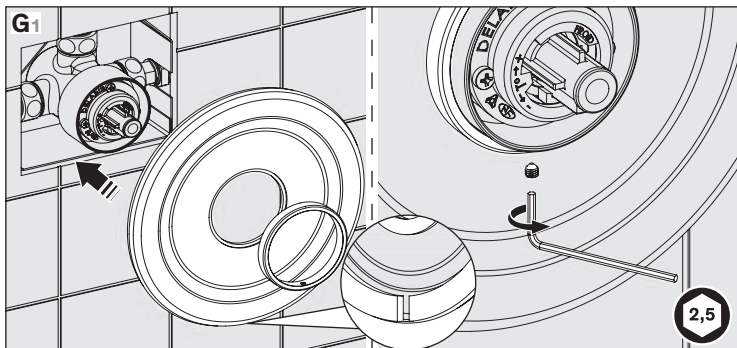

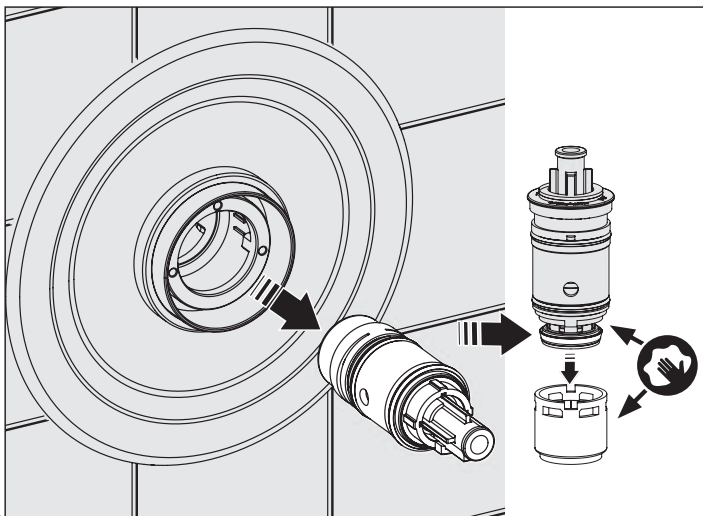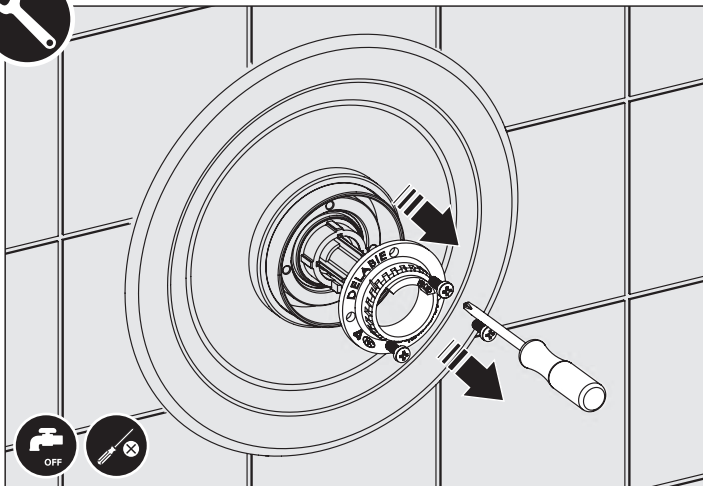

- Open by pressing the control knob.
- Select temperature by turning the control knob.
- Timed automatic shut-off after ~7 seconds for basins (+/- 3 seconds according to the European standard EN-NF 816) and ~30 seconds for showers (+5/- 10 at 3 bar according to the European standard EN-NF 816).
- The products have been designed to withstand both thermal and chemical shocks in line with current regulations.
- Recommended pressure: 1 - 5 bar.

INSTALLATION

- **Do not remove the non-return valves built into the water inlets (essential).**
- Fit the connection filters, in the same way as indicated in the instructional images. Their function is to protect the non-return valves and keep them in place.

THE INSTALLER MUST ENSURE:

- THE SEAL AROUND THE RECESSING HOUSING IS WATERPROOF TO PREVENT ANY INGRESS OF WATER;
- ANY WATER ACCIDENTALLY ENTERING THE RECESSING HOUSING (E.G. CONDENSATION, RUN OFF, LEAKS, ETC.) HAS AN EXTERNAL DRAINAGE POINT TO PREVENT ANY STAGNATION;
- THE INTEGRITY OF THE SEALS BETWEEN THE STAINLESS STEEL WALL PLATE AND THE WALL OR THE WALL PLATE AND THE MIXER AT LEAST ONCE A YEAR, AND MAKE GOOD IF NECESSARY.

If this advice is not followed, water may leak into the wall.

DELABIE cannot be held responsible for any ingress.

FOR FURTHER INFORMATION PLEASE CALL DELABIE TECHNICAL SUPPORT

UK: 01491 821821. **ALL OTHER MARKETS:** +33 (0)3 22 60 22 74.

FLOW RATE ADJUSTMENT (Fig. 1.I or 2.D or 3.G or 4.H or 5.G)

- The flow rate is pre-set at the factory at 3 lpm at 3 bar pressure for basins, it can be adjusted.
- Shower kits are equipped with ROUND or TONIC JET shower head and the shower panels are set at 6 lpm at 3 bar.
- The shower mixers are pre-set at 12 lpm at 3 bar.

REMEMBER

- **Our mixers must be installed by professional installers** in accordance with current regulations and recommendations in your country, and the specifications of the fluid engineer.
- **Sizing the pipes correctly** will avoid problems of flow rate, pressure loss and water hammer (see calculation table in our brochure and online at www.delabie.com).
- **Protect the installation** with filters, water hammer absorbers and pressure reducers to reduce the frequency of maintenance (recommended pressure from 1 to 5 bar maximum).
- **Install stopcocks** close to the mixer to facilitate maintenance.
- The pipework, filters, non-return valves, stopcocks, bib taps, cartridge and all sanitary fittings should be checked at least once a year, and more frequently if necessary.

We recommend checking the following parts annually:

- **Non-return valves and filters:** descaling and replacement of worn or damaged parts.
- **Interchangeable cartridge:** de-scale internal parts, and replace any worn or damaged parts.

MAINTENANCE & CLEANING

- **Cleaning chrome and stainless steel:** do not use abrasive, chlorine or any other acid-based cleaning products. Clean with mild soapy water using a cloth or a sponge.
- **Frost protection:** drain the pipes and operate the mixer several times to drain any remaining water. In the event of prolonged exposure to frost, we recommend taking the mechanisms apart and storing them indoors.

After Sales Care Support:

For the UK market only: Tel. 01491 821 821 - **email:** technical@delabie.co.uk

The installation guide is available on: www.delabie.co.uk

For all other markets: Tel. +33 (0)3 22 60 22 74 - **email:** sav@delabie.fr

The installation guide is available on: www.delabie.com

DELABIE

**743795 / 743791
743796 / 743786
743790 / 743789**

NT 74378
Indice A

FR *Cartouche pour TEMPOMIX*

EN *TEMPOMIX cartridge*

DE *Kartusche für TEMPOMIX*

PL *Głowica TEMPOMIX*

NL *Binnenwerk TEMPOMIX*




FR Purger soigneusement les canalisations avant la pose et la mise en service du produit.

EN Thoroughly flush the pipes to remove any impurities before installing and commissioning the product.


DE Vor Montage und Inbetriebnahme des Produkts die Anschlussleitungen regelkonform spülen.

PL Dokładnie wypłukać instalację przed montażem i uruchomieniem produktu.



NL Spoel zorgvuldig de leidingen alvorens tot installatie of ingebruikname van de kraan over te gaan.




Réf. 790000, 790001, 790006, 790008, 790204, 790214, 790218,
790219, 790300, 79030015, 790305, 79030515, 790310, 790350,
79035015, 790370, 790425, 790427, 790709, 790874, 790875,
790909, 790912, 790709, 790712, 790925, 790927, 790970



743790

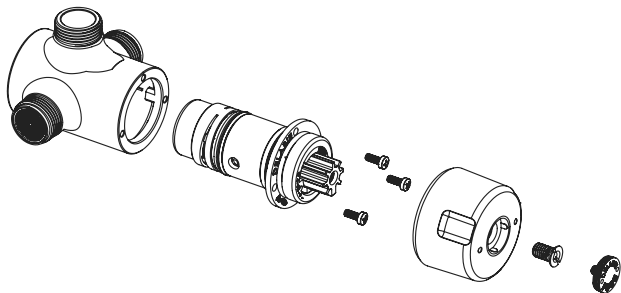

Réf. 790000, 790001, 790006, 790008, 790204, 790214, 790218,
790219, 790300, 79030015, 790305, 79030515, 790310, 790350,
790370, 79035015, 790425, 790427, 790709, 790874, 790875,
790909, 790912, 790709, 790712, 790925, 790927, 790970



743789

