

VP306

- High quality construction
- Supplied complete with handles, buttons and outlets
- Serviceable with all wearing components replaceable, thus providing a longer life
- Fixed outlet with Aerator
- Adjustable centres of the basin tee allow the set to be formatted on installation to fit a range of three tap hole basins/Sink/Bench
- WELS 3 Star (7.7 lpm) water efficiency rating supplied as standard. Also available in 5 and 6 Star ratings

- Anti-Vandal Aerator available - SP303
- Swivel or alternate spout sizes refer to the brochure


VP306	Jumper Valve
VP306S	Jumper Valve (School Specification)
VPN306	Jumper Valve Non Removable Handle
VPQ306	1/2 Turn Ceramic Disc



Working Pressure Range Ceramic Disc	50-800kPa
	500kPa Max (PCA)*
Working Pressure Range Jumper Valve	30-1200kPa
	500kPa Max (PCA)*
Maximum Working Temperature*	Ceramic Disc - 85°C
	Jumper Valve - 95°C

NOTE: Enware Australia advises:

1. Due to ongoing Research and Development, specifications may change without notice.
2. Component specifications may change on some export models.
3. Refer to Warranty Statement for Warranty details www.enware.com.au/warranty

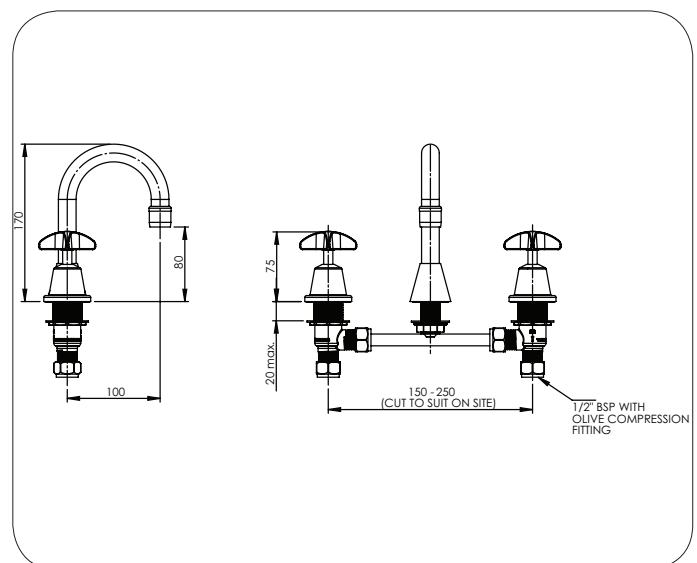

Call 1300 369 273
www.enware.com.au

