

Wellbeing Livia: Lever Basin Set - Swivel Spout

The Livia 3-piece lever range has been created in conjunction with design consultants and dementia specialists to ensure Livia's style and functionality meets the needs of residents in permanent aged care and independent living units. When it comes to transitioning from the familiar home environment to an unfamiliar aged care environment, it can be challenging. The Livia range of lever taps brings a sense of style to the independent living or aged care accommodation space helping residents feel more comfortable about their new home. Functionality that is familiar is of equal importance to style in an aged care ensuite. Wellbeing Livia range - a blend of familiarity, style and function.



KEY FEATURES

- Highly visible indicators
- Easy to use, easy to hold handle design
- 100mm lever handles with vandal resistant fixing, metal chrome plated
- 155mm long reach concealed aerator spout capable of being fixed or swivel
- Swivel spout allows for full functional use of the basin by the end user
- Easy to operate quarter turn ceramic disc cartridge
- Flexibility is provided to the facility by the inclusion of handles with RED, BLUE and YELLOW indicators on both the top and side surfaces of the handle
- 10 year commercial use warranty
- 5 Star WELS laminarinsert (5L/min - fitted), with 5 Star (5.5L/min) and 6 Star WELS (3L/min) aerators (supplied in carton)

PRODUCT CODE

LIV100BASIN

Wellbeing Livia: Lever Basin Set - Swivel Spout



Due to ongoing Research and Development, specifications may change without notice.
Component specifications may change on some export models.

Refer to warranty statement for warranty details - www.enware.com.au/warranty.


Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500.

Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

Wellbeing Livia: Lever Basin Set - Swivel Spout

TECHNICAL DATA

| | |
|--------------------------|---------|
| Maximum Temperature | 85°C |
| Minimum Working Pressure | 100kPa |
| Maximum Working Pressure | 800kPa |
| Inlet Connection | 1/2"BSP |

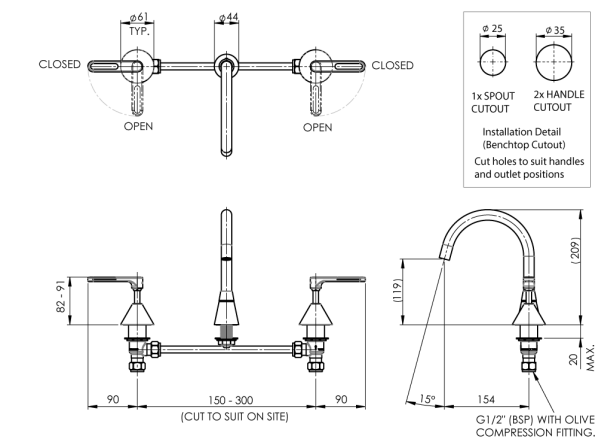

SPARE PARTS

| | |
|--------|---|
| MIS590 | Vandal Proof Key Only |
| SP190 | Spare Parts: Hob Mounted: Spout Base - Classic Outlet Range |