Enware-Delabie TempoSoft Time Flow Basin Tap

Time flow basin tap with easy to use soft-push operation. Automatic shut-off for improved hygiene and reduced water wastage.

Ideal for public washrooms, schools, child care and applications where easy activation is beneficial.

FEATURES

- · Soft push activation
- Approximately 7 second* flow time
- Automatic shut-off without manual contact
- Hygienic, anti-scale flow straightener outlet
- 6 Star Water Efficiency Rating
- Brass body with vandal resistant design
- Supplied with blue, yellow and red indicators
- Bright chrome finish

*Flow times are indicative only and may vary depending on water supply pressure and flow conditions.





TFC740510 7 Second* – 6 Star WELS Rating



TFCS-SPACER - Spacer to suit 35mm Tap Hole





Technical Information

Inlet Connection	15mm 1/2" BSP
Recommended Working Pressure	250-350 kPa
Operating Working Pressure	80 - 500 kPa
Maximum Water Temperature	50°C

Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500.

Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

NOTE: Enware Australia advises: 1. Due to ongoing Research and Development, specifications may change without notice. 2. Component specifications may change on some export models.

45° 45° INSTALLATION DETAIL Q22-25 120 BENCHTOP CUTOUT TAP HOLE SIZE

AS1428.1 Compliance

Meets the dimensional requirements when used with the Kolo 500, 600, 550 Semi Recessed and Lutana 770 basins.

Important: This information is provided as a guide only and is based on AS1428.1-2009 and 2010 amendments. Independent design assessment and approval by an appropriately qualified consultant is required to ensure compliance with standards and building code requirements.



Version 1.1__16Mar23


Call 1300 369 273 www.enware.com.au



Enware-Delabie TempoSoft Time Flow Basin Tap

TFC740510

SPARE PARTS

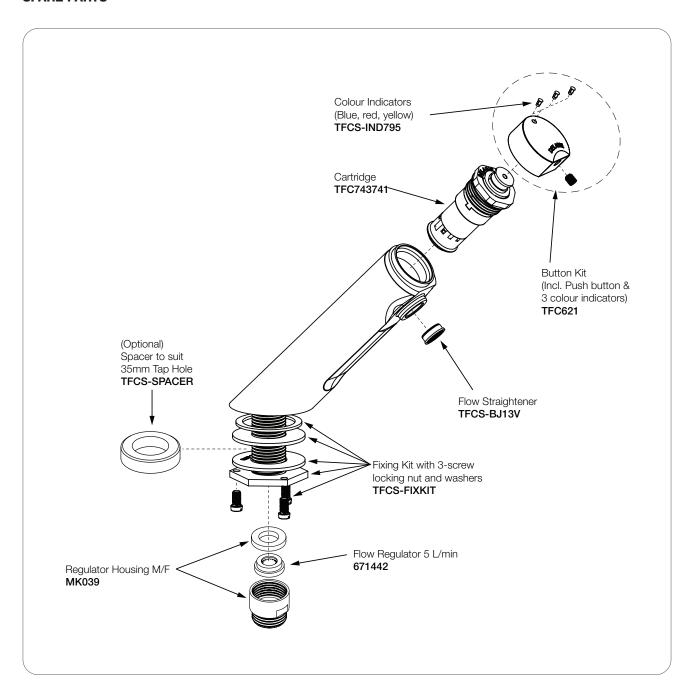

Version 1.1__16Mar23



