Enware-Delabie Tempomix Shower Mixer - Recessed

The Tempomix shower mixers when operated provides a 30 second* run time and automatic shut-off, with the added benefit of temperature control. With an easy push button activation, the temperature is adjustable by rotating the control knob. Designed to comply with intensive use in public areas with a high resistance to vandalism.

FEATURES

- Easy push button activation
- Automatic shut-off after timed flow of 30 seconds (-10/+5 sec)*
- Cover plate is without exposed screws providing a high resistance to vandalism
- User temperature control: simply rotate button to increase or decrease temperature

OPTIONS

Shower heads to suit available.

Enware-Delabie Tonic Jet Vandal Resistant Shower Head TFC712000 School Pattern Shower Outlet VP310

DELABIE

TFC790925

Product Codes

TFC790925 Tempomix Shower Mixer - Recessed

WaterMark AS/NZS 3718 WM20302


Technical Information

Inlet Connection	15mm (1/2 " BSP)
Maximum Testing Pressure	1000 kPa
Maximum Working Pressure	500 kPa **
Recommended Pressure	250 - 300 kPa
Maximum Water Temperature	70°C**
Operating Force	22N @ 300 kPa

^{**}Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500.

Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

NOTE: Enware Australia advises: 1. Due to ongoing Research and Development, specifications may change without notice. 2. Component specifications may change on some export models. 3. Refer to Warranty Statement for warranty details - www.enware.com.au/warranty

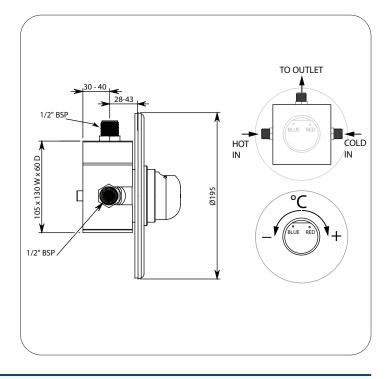

Version: Jun 21

Call 1300 369 273 www.enware.com.au







^{*}Times are indicative only and may vary depending on the water supply pressure and flow conditions

Enware-Delabie Tempomix Shower Mixer - Recessed

SPARE PARTS

TFC790925

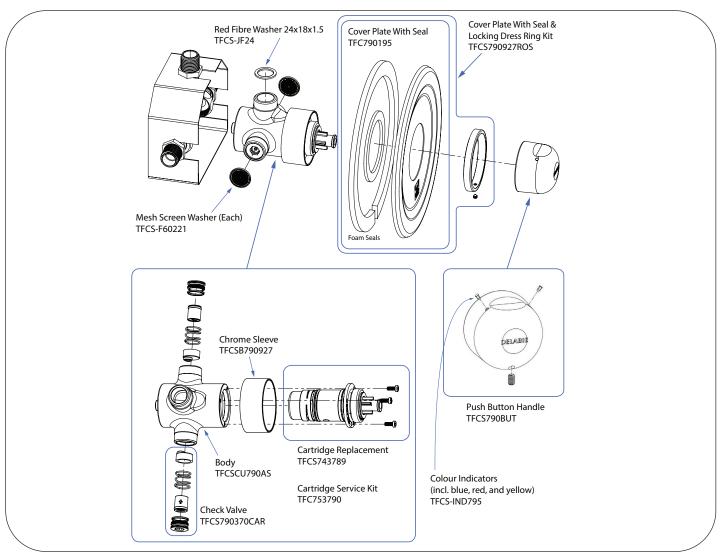

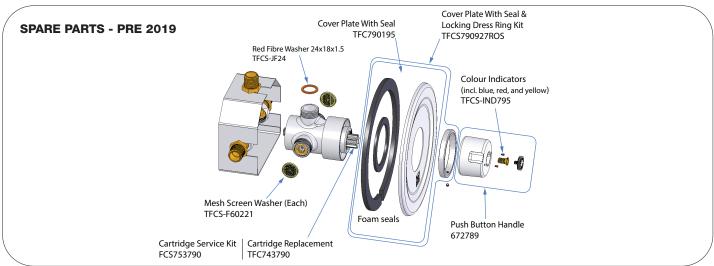

Version: Jun 21

Call 1300 369 273 www.enware.com.au

